

EDDA FJORD

MULTI PURPOSE SHIP
ØSTENSJØ REDERI

FREQUENCY TBD		
WX INFORMATION ON REQUEST FROM BRIDGE		LIGHTING ON REQUEST FROM BRIDGE
HELIDECK HEIGHT 60 FT MSL	MTOW 9,3 t	D-VALUE 19,52 m
LANDING NET N/A		HAPI N/A
HELIDECK POSITION ON INSTALLATION BOW IN FRONT OF BRIDGE		
HIGEST OBSTACLES ON INSTALLATION		
BRIDGE WITH MASTS	CRANE	GANGWAY
REFUELLING FACILITY N/A		GROUND POWER UNIT N/A



NON COMPLIANCES

- OBSTACLE-FREE SECTORS INFRINGED BY BRIDGE AND HAND RAILS
- HELIDECK FRICTION BELOW INTERNATIONAL RECOMMENDATION

LIMITATIONS


- LIMITED TO WIND OF 30KTS AND LIGHT SHIP MOVEMENTS FOR FLIGHT OPS WITHOUT HELIDECK NET
- VFR ONLY
- NIGHT FLIGHT OPS ONLY WITH ALL HELIDECK AND OBSTACLE LIGHTS FUNCTIONING AND SHIP NOT IN PROXIMITY TO COMPLEX OBSTACLE ENVIRONMENT
- PROHIBITED LANDING HEADING SECTOR
- OVERFLIGHT OF SHIP / STRUCTURE PROHIBITED

EDDA FJORD

MULTI PURPOSE SHIP
ØSTENSJØ REDERI

FREQUENCY TBD		
WX INFORMATION ON REQUEST FROM BRIDGE		LIGHTING ON REQUEST FROM BRIDGE
HELIDECK HEIGHT 60 FT MSL	MTOW 9,3 t	D-VALUE 19,52 m
LANDING NET N/A		HAPI N/A
HELIDECK POSITION ON INSTALLATION BOW IN FRONT OF BRIDGE		
HIGEST OBSTACLES ON INSTALLATION		
BRIDGE WITH MASTS	CRANE	GANGWAY
REFUELLING FACILITY N/A		GROUND POWER UNIT N/A

INSTALLATION PROFILE VIEW

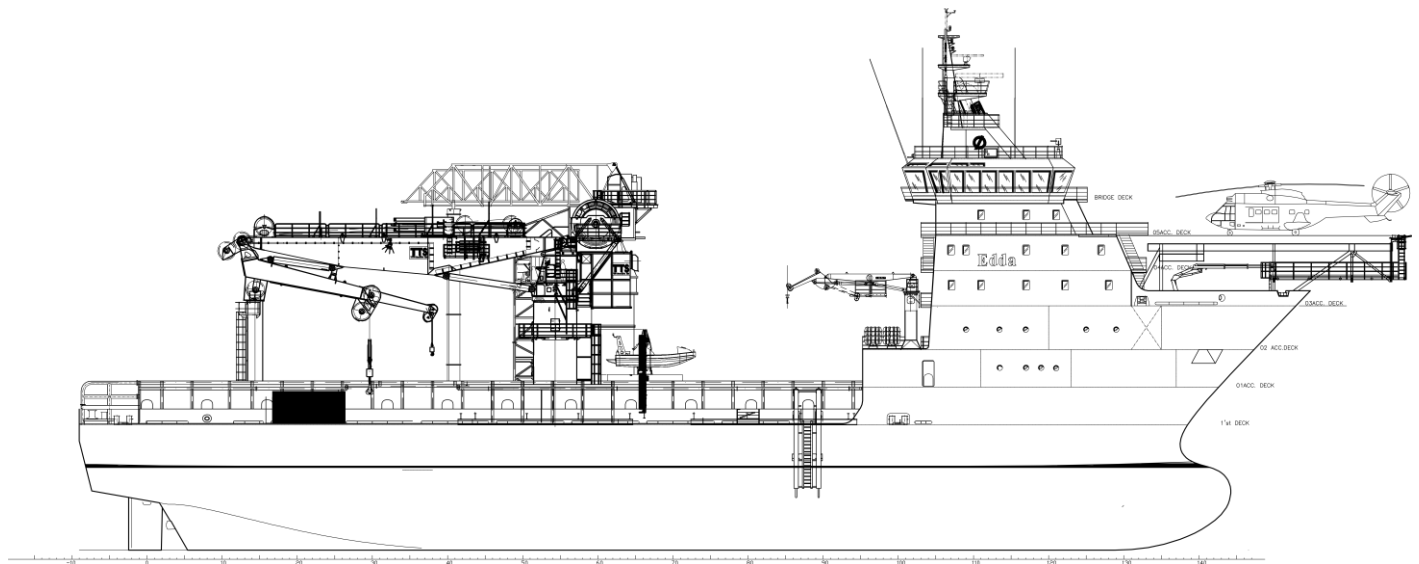


EDDA FJORD

MULTI PURPOSE SHIP
ØSTENSJØ REDERI

FREQUENCY TBD		
WX INFORMATION ON REQUEST FROM BRIDGE		LIGHTING ON REQUEST FROM BRIDGE
HELIDECK HEIGHT 60 FT MSL	MTOW 9,3 t	D-VALUE 19,52 m
LANDING NET N/A		HAPI N/A
HELIDECK POSITION ON INSTALLATION BOW IN FRONT OF BRIDGE		
HIGEST OBSTACLES ON INSTALLATION		
BRIDGE WITH MASTS	CRANE	GANGWAY
REFUELLING FACILITY N/A		GROUND POWER UNIT N/A

HELIDECK TOP VIEW

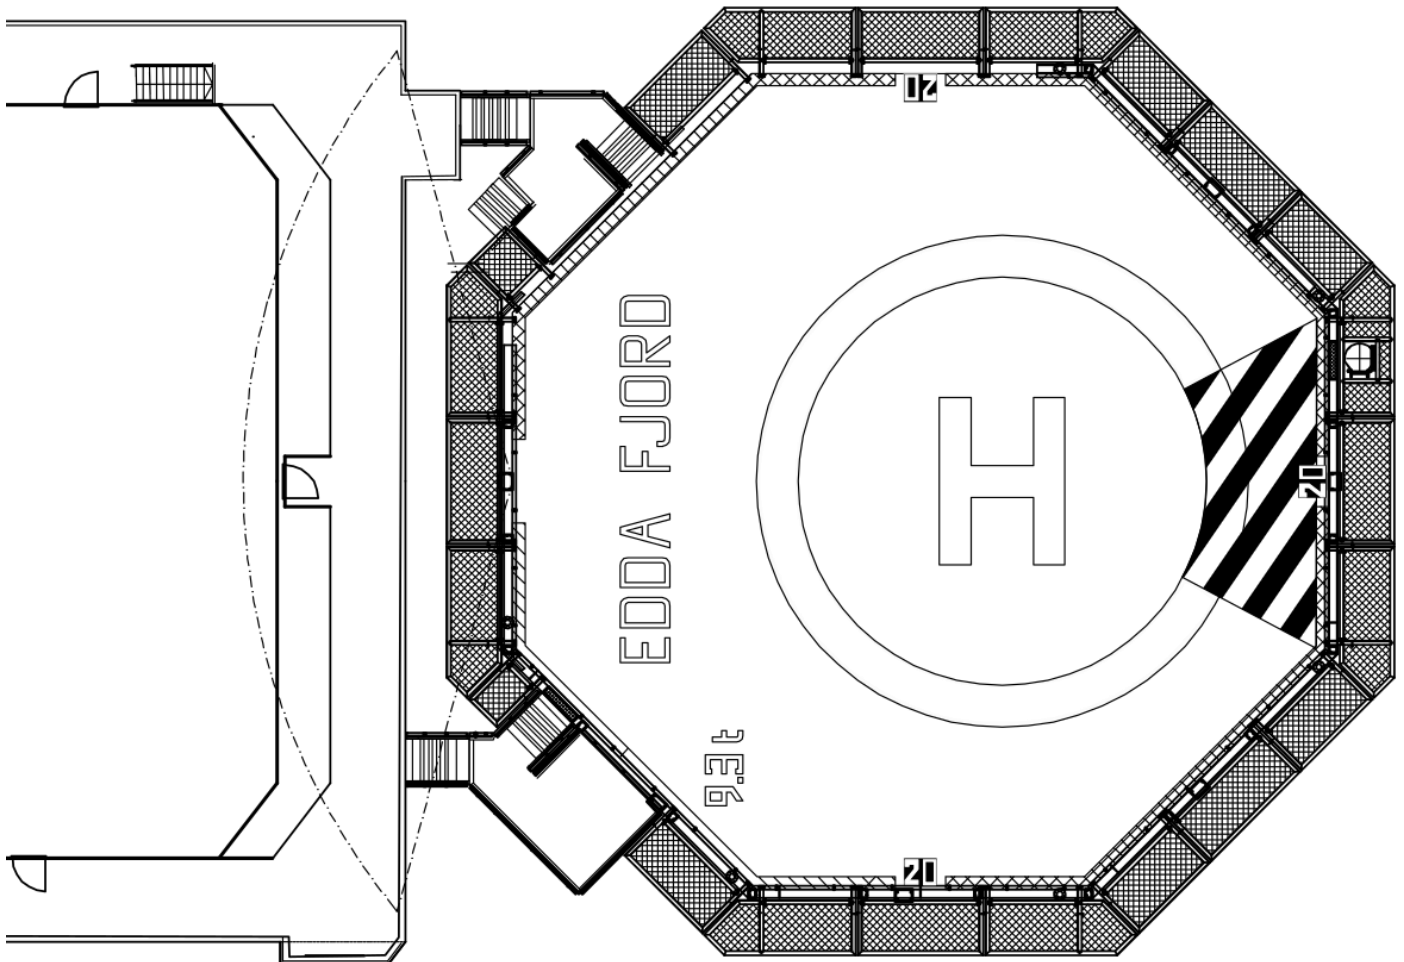

EDDA FJORD

MULTI PURPOSE SHIP
ØSTENSJØ REDERI

FREQUENCY TBD		
WX INFORMATION ON REQUEST FROM BRIDGE		LIGHTING ON REQUEST FROM BRIDGE
HELIDECK HEIGHT 60 FT MSL	MTOW 9,3 t	D-VALUE 19,52 m
LANDING NET N/A		HAPI N/A
HELIDECK POSITION ON INSTALLATION BOW IN FRONT OF BRIDGE		
HIGEST OBSTACLES ON INSTALLATION		
BRIDGE WITH MASTS	CRANE	GANGWAY
REFUELLING FACILITY N/A		GROUND POWER UNIT N/A
REMARKS		
<ul style="list-style-type: none"> • CONTACT FREQUENCY TO BE SPECIFIED BY THE PROJECT / <i>HELIDECK STATUS REPORT</i> • ACTUAL HELIDECK HEIGHT DEPENDENT ON SEA STATE • APPROACH / DEPARTURE DIRECTION TO BE EVALUATED FROM <i>HELIDECK STATUS REPORT</i> • PERIMETER SAFETY NET: 1.50 M • NO COVER OVER EMERGENCY LADDER AND AROUND FIRE FIGHTING MONITORS NEXT TO EXITS • MARKINGS AND LIGHTING IN ACCORDANCE WITH ICAO ANNEX 14 VOL. II / CAP 437 		