

ORION

HLD IDENTIFICATION

ORION

VESSEL SIDE IDENTIFICATION

ORION

OFFSHORE INSTALLATION VESSEL

DEME OFFSHORE

BRIDGE / HLO

CONTACT FREQUENCY TBD WITH PROJECT

**WEATHER INFORMATION
ON REQUEST**
**LIGHTING & DIMMING
ON REQUEST**
**HELIDECK HEIGHT
36.5 m – 41.5 m**
**D-VALUE
22,20 m**
**MTOW
12.8 t**
**HELIDECK POSITION ON VESSEL
BOW PORT SIDE**
**HIGHEST OBSTACLE ON VESSEL
CRANE 195 ft (ABOVE HLD)**
**REFUELLING FACILITY
N/A**
**GROUND POWER UNIT
YES**
**LANDING NET
YES**
**TD/PM LIGHTING
YES**
**HELIPORT IDENT LIGHTING
YES**
**STATUS LIGHT
YES**
FIRE FIGHTING FACILITIES
**3 MONITORS
MANUAL ACTIVATION**
**3 HYDRANTS
3x SEMI RIDGID HOSES**
**CO₂
1x 20 kg**
**DRY POWDER
2x 25 kg**


ORION

HLD IDENTIFICATION

ORION

VESSEL SIDE IDENTIFICATION

ORION

OFFSHORE INSTALLATION VESSEL

DEME OFFSHORE

BRIDGE / HLO

CONTACT FREQUENCY TBD WITH PROJECT

**WEATHER INFORMATION
ON REQUEST**
**LIGHTING & DIMMING
ON REQUEST**
**HELIDECK HEIGHT
36.5 m – 41.5 m**
**D-VALUE
22,20 m**
**MTOW
12.8 t**
**HELIDECK POSITION ON VESSEL
BOW PORT SIDE**
**HIGHEST OBSTACLE ON VESSEL
CRANE 195 ft (ABOVE HLD)**
**REFUELLING FACILITY
N/A**
**GROUND POWER UNIT
YES**
**LANDING NET
YES**
**TD/PM LIGHTING
YES**
**HELIPORT IDENT LIGHTING
YES**
**STATUS LIGHT
YES**
FIRE FIGHTING FACILITIES
**3 MONITORS
MANUAL ACTIVATION**
**3 HYDRANTS
3x SEMI RIGID HOSES**
**CO₂
1x 20 kg**
**DRY POWDER
2x 25 kg**
NON – COMPLIANCES

- NONE

LIMITATIONS

- NONE

REMARKS

- CONTACT BRIDGE / HLO FOR CLEARANCES, REQUESTS AND INFORMATION
- HELIDECK ORIENTATION TO BE TAKEN FROM HLD STATUS REPORT
- OVERFLIGHT OF VESSEL PROHIBITED
- SURROUNDING WALKWAY
- CRANE BOOM MUST BE IN REST POSITION OR CLEAR OF OFS FOR ALL HELICOPTER OPERATIONS

ORION

HLD IDENTIFICATION
ORION

VESSEL SIDE IDENTIFICATION
ORION


OFFSHORE INSTALLATION VESSEL
DEME OFFSHORE

BRIDGE / HLO

CONTACT FREQUENCY TBD WITH PROJECT

WEATHER INFORMATION ON REQUEST		LIGHTING & DIMMING ON REQUEST	
HELIDECK HEIGHT 36.5 m – 41.5 m	D-VALUE 22,20 m	MTOW 12.8 t	
HELIDECK POSITION ON VESSEL BOW PORT SIDE			
HIGHEST OBSTACLE ON VESSEL CRANE 195 ft (ABOVE HLD)			
REFUELLING FACILITY N/A	GROUND POWER UNIT YES	LANDING NET YES	
TD/PM LIGHTING YES	HELIPORT IDENT LIGHTING YES	STATUS LIGHT YES	
FIRE FIGHTING FACILITIES			
3 MONITORS MANUAL ACTIVATION	3 HYDRANTS 3x SEMI RIDGID HOSES	CO₂ 1x 20 kg	DRY POWDER 2x 25 kg

VESSEL PROFILE VIEW (STARBOARD)

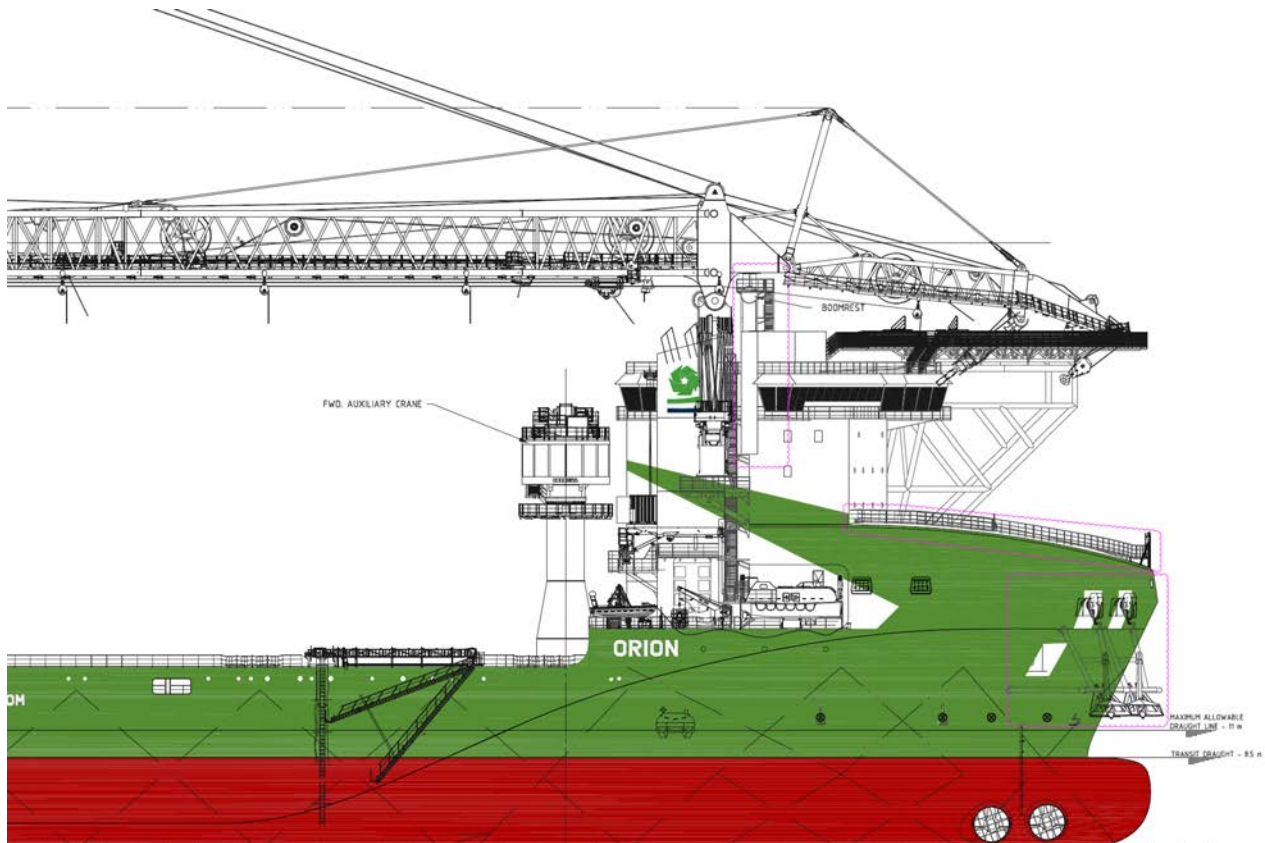

ORION

HLD IDENTIFICATION
ORION

VESSEL SIDE IDENTIFICATION
ORION

OFFSHORE INSTALLATION VESSEL
DEME OFFSHORE

BRIDGE / HLO

CONTACT FREQUENCY TBD WITH PROJECT

WEATHER INFORMATION
ON REQUEST

LIGHTING & DIMMING
ON REQUEST

HELIDECK HEIGHT
36.5 m – 41.5 m

D-VALUE
22,20 m

MTOW
12.8 t

HELIDECK POSITION ON VESSEL
BOW PORT SIDE

HIGHEST OBSTACLE ON VESSEL
CRANE 195 ft (ABOVE HLD)

REFUELLING FACILITY
N/A

GROUND POWER UNIT
YES

LANDING NET
YES

TD/PM LIGHTING
YES

HELIPORT IDENT LIGHTING
YES

STATUS LIGHT
YES

FIRE FIGHTING FACILITIES

3 MONITORS
MANUAL ACTIVATION

3 HYDRANTS
3x SEMI RIDGID HOSES

CO₂
1x 20 kg

DRY POWDER
2x 25 kg

VESSEL TOP VIEW

