

# SEAFOX 7

HLD IDENTIFICATION  
**SEAFOX 7**

VESSEL SIDE IDENTIFICATION  
**SEAFOX 7**

JACK-UP VESSEL  
SEAFOX

BRIDGE / HLO

CONTACT FREQUENCY TBD WITH PROJECT

|  |   |  |                                 |
|--|---|--|---------------------------------|
| <b>WEATHER INFORMATION<br/>ON REQUEST</b>  |   | <b>LIGHTING &amp; DIMMING<br/>ON REQUEST</b> |                                 |
| <b>HELIDECK HEIGHT<br/>VARIABLE</b>        | <b>D-VALUE<br/>19.50 m</b>                      | <b>MTOW<br/>9.3 t</b>                        |                                 |
| <b>HELIDECK POSITION ON VESSEL<br/>BOW</b> |   |  |                                 |
| <b>HIGHEST OBSTACLES ON VESSEL</b>         |   |  |                                 |
| <b>4x LEGS<br/>VARIABLE</b>                |   | <b>CRANE<br/>VARIABLE</b>                    |                                 |
| <b>REFUELLING FACILITY<br/>YES (PPR)</b>   | <b>GROUND POWER UNIT<br/>N/A</b>                | <b>LANDING NET<br/>YES</b>                   |                                 |
| <b>TD/PM LIGHTING<br/>N/A</b>              | <b>HELIPORT IDENTIFICATION LIGHTING<br/>N/A</b> | <b>STATUS LIGHT<br/>YES</b>                  |                                 |
| <b>FIRE FIGHTING FACILITIES</b>            |   |  |                                 |
| <b>2 MONITOR<br/>MANUAL ACTIVATION</b>     | <b>2 HYDRANTS<br/>FLEXIBLE HOSES (30 m)</b>     | <b>CO<sub>2</sub><br/>2 x 30 kg</b>          | <b>DRY POWDER<br/>2 x 50 kg</b> |



# SEAFOX 7

 HLD IDENTIFICATION  
**SEAFOX 7**

 VESSEL SIDE IDENTIFICATION  
**SEAFOX 7**

 JACK-UP VESSEL  
 SEAFOX

| BRIDGE / HLO  |   |   |                         |
|---|---|---|-------------------------|
| CONTACT FREQUENCY TBD WITH PROJECT  |   |   |                         |
| WEATHER INFORMATION<br>ON REQUEST   |   | LIGHTING & DIMMING<br>ON REQUEST  |                         |
| HELIDECK HEIGHT<br>VARIABLE   | D-VALUE<br>19.50 m                      | MTOW<br>9.3 t   |                         |
| HELIDECK POSITION ON VESSEL<br>BOW  |   |   |                         |
| HIGHEST OBSTACLES ON VESSEL   |   |   |                         |
| 4x LEGS<br>VARIABLE   |   | CRANE<br>VARIABLE   |                         |
| REFUELLING FACILITY<br>YES (PPR)  | GROUND POWER UNIT<br>N/A                | LANDING NET<br>YES  |                         |
| TD/PM LIGHTING<br>N/A   | HELIPORT IDENTIFICATION LIGHTING<br>N/A | STATUS LIGHT<br>YES   |                         |
| FIRE FIGHTING FACILITIES  |   |   |                         |
| 2 MONITOR<br>MANUAL ACTIVATION  | 2 HYDRANTS<br>FLEXIBLE HOSES (30 m)     | CO <sub>2</sub><br>2 x 30 kg  | DRY POWDER<br>2 x 50 kg |
| <b>NON - COMPLIANCES</b><br><ul style="list-style-type: none"> <li>OBSTACLE-FREE SECTOR INFRINGED BY PORTSIDE LEG</li> </ul>  |   | <b>LIMITATIONS</b><br><ul style="list-style-type: none"> <li>NIL</li> </ul> |                         |
| <b>REMARKS</b><br><ul style="list-style-type: none"> <li>CONTACT BRIDGE / HLO FOR CLEARANCES, REQUESTS AND INFORMATION</li> <li>OBSTACLE-FREE SECTOR TURNED BY 15°</li> <li>FLIGHT OPERATIONS ONLY WITH CRANE RESTING CLEAR OF OBSTACLE PROTECTED SURFACES</li> <li>FLIGHT OPERATIONS PROHIBITED WHEN VESSEL UNDERWAY</li> <li>HELIDECK ORIENTATION TO BE TAKEN FROM HLD STATUS REPORT</li> <li>HELIDECK HEIGHT TO BE CHECKED FOR EACH LOCATION</li> <li>OVERFLIGHT OF VESSEL PROHIBITED</li> </ul> |   |   |                         |

# SEAFOX 7

HLD IDENTIFICATION  
**SEAFOX 7**

VESSEL SIDE IDENTIFICATION  
**SEAFOX 7**


JACK-UP VESSEL  
SEAFOX

BRIDGE / HLO

CONTACT FREQUENCY TBD WITH PROJECT

|   |  |   |                                |
|---|--|---|--------------------------------|
| <b>WEATHER INFORMATION</b><br>ON REQUEST  |  | <b>LIGHTING &amp; DIMMING</b><br>ON REQUEST |                                |
| <b>HELIDECK HEIGHT</b><br>VARIABLE        | <b>D-VALUE</b><br>19.50 m                      | <b>MTOW</b><br>9.3 t                        |                                |
| <b>HELIDECK POSITION ON VESSEL</b><br>BOW |  |   |                                |
| <b>HIGHEST OBSTACLES ON VESSEL</b>        |  |   |                                |
| <b>4x LEGS</b><br>VARIABLE                |  | <b>CRANE</b><br>VARIABLE                    |                                |
| <b>REFUELLING FACILITY</b><br>YES (PPR)   | <b>GROUND POWER UNIT</b><br>N/A                | <b>LANDING NET</b><br>YES                   |                                |
| <b>TD/PM LIGHTING</b><br>N/A              | <b>HELIPORT IDENTIFICATION LIGHTING</b><br>N/A | <b>STATUS LIGHT</b><br>YES                  |                                |
| <b>FIRE FIGHTING FACILITIES</b>           |  |   |                                |
| <b>2 MONITOR</b><br>MANUAL ACTIVATION     | <b>2 HYDRANTS</b><br>FLEXIBLE HOSES (30 m)     | <b>CO<sub>2</sub></b><br>2 x 30 kg          | <b>DRY POWDER</b><br>2 x 50 kg |

**VESSEL PROFILE VIEW (STARBOARD)**

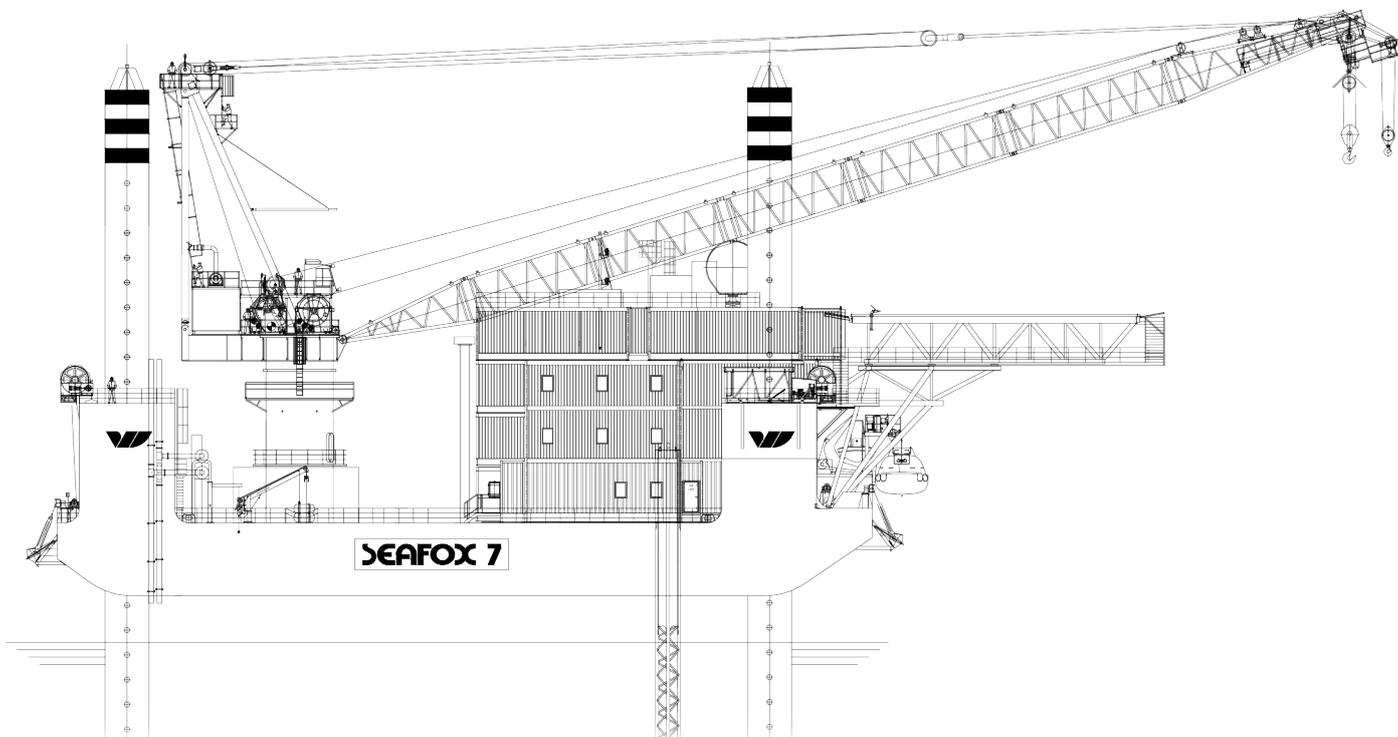

# SEAFOX 7

HLD IDENTIFICATION  
**SEAFOX 7**

VESSEL SIDE IDENTIFICATION  
**SEAFOX 7**

JACK-UP VESSEL  
SEAFOX

BRIDGE / HLO

CONTACT FREQUENCY TBD WITH PROJECT

|   |  |   |                                |
|---|--|---|--------------------------------|
| <b>WEATHER INFORMATION</b><br>ON REQUEST  |  | <b>LIGHTING &amp; DIMMING</b><br>ON REQUEST |                                |
| <b>HELIDECK HEIGHT</b><br>VARIABLE        | <b>D-VALUE</b><br>19.50 m                      | <b>MTOW</b><br>9.3 t                        |                                |
| <b>HELIDECK POSITION ON VESSEL</b><br>BOW |  |   |                                |
| <b>HIGHEST OBSTACLES ON VESSEL</b>        |  |   |                                |
| <b>4x LEGS</b><br>VARIABLE                |  | <b>CRANE</b><br>VARIABLE                    |                                |
| <b>REFUELLING FACILITY</b><br>YES (PPR)   | <b>GROUND POWER UNIT</b><br>N/A                | <b>LANDING NET</b><br>YES                   |                                |
| <b>TD/PM LIGHTING</b><br>N/A              | <b>HELIPORT IDENTIFICATION LIGHTING</b><br>N/A | <b>STATUS LIGHT</b><br>YES                  |                                |
| <b>FIRE FIGHTING FACILITIES</b>           |  |   |                                |
| <b>2 MONITOR</b><br>MANUAL ACTIVATION     | <b>2 HYDRANTS</b><br>FLEXIBLE HOSES (30 m)     | <b>CO<sub>2</sub></b><br>2 x 30 kg          | <b>DRY POWDER</b><br>2 x 50 kg |

**VESSEL TOP VIEW**

