

WIND OF CHANGE

SERVICE OPERATIONS VESSEL (SOV)
LOUIS DREYFUS ARMATEURS S.A.S.

FREQUENCY TBD BY PROJECT		
WX INFORMATION ON REQUEST FROM BRIDGE		LIGHTING ON REQUEST FROM BRIDGE
HELIDECK HEIGHT 46 FT MSL	MTOW 7,0 t	D-VALUE 17,60 m
LANDING NET N/A		HAPI N/A
HELIDECK POSITION ON INSTALLATION BOW IN FRONT OF BRIDGE		
HIGEST OBSTACLES ON INSTALLATION		
BRIDGE WITH MASTS	CRANE	GANGWAY
REFUELLING FACILITY N/A		GROUND POWER UNIT YES



NON COMPLIANCES

- OBSTACLE-FREE SECTORS INFRINGED BY BRIDGE AND HAND RAILS

LIMITATIONS


- FLIGHT OPS ON CAPTAIN'S DISCRETION
- VFR ONLY / NIGHT FLIGHT OPERATIONS NOT INTENDED
- NIGHT FLIGHT OPS ONLY WITH ALL HELIDECK AND OBSTACLE LIGHTS FUNCTIONING AND VESSEL IS NOT IN PROXIMITY TO COMPLEX OBSTACLE ENVIRONMENT
- CRANE AND GANGWAY MUST BE IN REST POSITION
- OVERFLIGHT OF VESSEL PROHIBITED

WIND OF CHANGE

SERVICE OPERATIONS VESSEL (SOV)
LOUIS DREYFUS ARMATEURS S.A.S.

FREQUENCY TBD BY PROJECT		
WX INFORMATION ON REQUEST FROM BRIDGE		LIGHTING ON REQUEST FROM BRIDGE
HELIDECK HEIGHT 46 FT MSL	MTOW 7,0 t	D-VALUE 17,60 m
LANDING NET N/A		HAPI N/A
HELIDECK POSITION ON INSTALLATION BOW IN FRONT OF BRIDGE		
HIGEST OBSTACLES ON INSTALLATION		
BRIDGE WITH MASTS	CRANE	GANGWAY
REFUELLING FACILITY N/A		GROUND POWER UNIT YES

INSTALLATION PROFILE VIEW

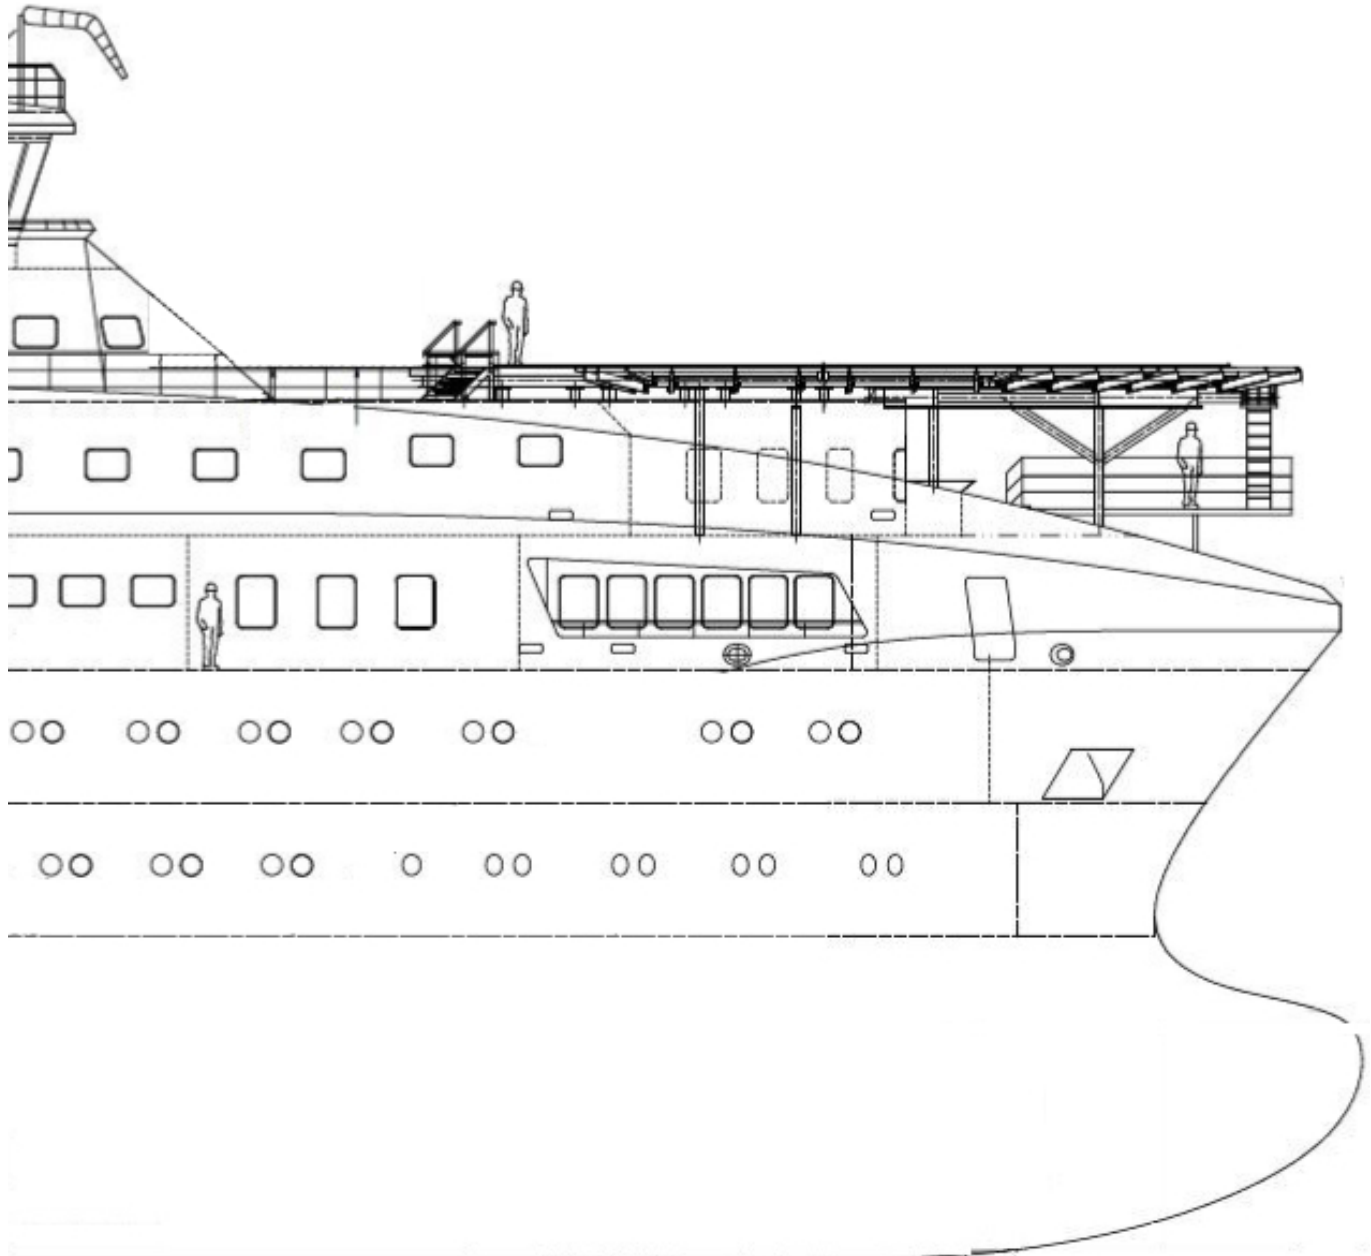

WIND OF CHANGE

SERVICE OPERATIONS VESSEL (SOV)
LOUIS DREYFUS ARMATEURS S.A.S.

FREQUENCY TBD BY PROJECT		
WX INFORMATION ON REQUEST FROM BRIDGE		LIGHTING ON REQUEST FROM BRIDGE
HELIDECK HEIGHT 46 FT MSL	MTOW 7,0 t	D-VALUE 17,60 m
LANDING NET N/A		HAPI N/A
HELIDECK POSITION ON INSTALLATION BOW IN FRONT OF BRIDGE		
HIGEST OBSTACLES ON INSTALLATION		
BRIDGE WITH MASTS	CRANE	GANGWAY
REFUELLING FACILITY N/A		GROUND POWER UNIT YES

HELIDECK TOP VIEW



WIND OF CHANGE

SERVICE OPERATIONS VESSEL (SOV)
LOUIS DREYFUS ARMATEURS S.A.S.

FREQUENCY TBD BY PROJECT		
WX INFORMATION ON REQUEST FROM BRIDGE		LIGHTING ON REQUEST FROM BRIDGE
HELIDECK HEIGHT 46 FT MSL	MTOW 7,0 t	D-VALUE 17,60 m
LANDING NET N/A		HAPI N/A
HELIDECK POSITION ON INSTALLATION BOW IN FRONT OF BRIDGE		
HIGEST OBSTACLES ON INSTALLATION		
BRIDGE WITH MASTS	CRANE	GANGWAY
REFUELLING FACILITY N/A		GROUND POWER UNIT YES

REMARKS

- ACTUAL HELIDECK HEIGHT TO BE CHECKED FOR EACH LOCATION
- ACTUAL VESSEL ORIENTATION TO BE TAKEN FROM HELIDECK STATUS REPORT
- PERIMETER SAFETY NET: 1,50 METRES
- MARKINGS AND LIGHTING IN ACCORDANCE WITH ICAO ANNEX 14 VOL. 2 / CAP 437
- PORT APPROACH PREFERRED