

L/B JILL

HLD IDENTIFICATION
L/B JILL

VESSEL SIDE IDENTIFICATION
L/B JILL

LIFTBOAT
SEACOR MARINE

BRIDGE

CONTACT FREQUENCY TBD WITH PROJECT

WEATHER INFORMATION ON REQUEST		LIGHTING & DIMMING ON REQUEST	
HELIDECK HEIGHT VARIABLE	D-VALUE 22.20 m	MTOW 12.8 t	
HELIDECK POSITION ON VESSEL STERN			
HIGHEST OBSTACLES ON VESSEL 3x LEGS MAX. 240 ft (ABOVE HLD)			
REFUELLING FACILITY N/A	GROUND POWER UNIT N/A	LANDING NET N/A	
TD/PM LIGHTING N/A	HELIPORT IDENTIFICATION LIGHTING N/A	STATUS LIGHT N/A	
FIRE FIGHTING FACILITIES			
DIFFS MANUAL ACTIVATION	2 HYDRANTS 1x SEMI-RIGID (20m) 1x FLEXIBLE (20m)	CO₂ 1 x 20 kg	DRY POWDER 2 x 25 kg



L/B JILL

HLD IDENTIFICATION

L/B JILL

VESSEL SIDE IDENTIFICATION

L/B JILL

LIFTBOAT
SEACOR MARINE

BRIDGE
CONTACT FREQUENCY TBD WITH PROJECT

WEATHER INFORMATION ON REQUEST	LIGHTING & DIMMING ON REQUEST
--	---

HELIDECK HEIGHT VARIABLE	D-VALUE 22.20 m	MTOW 12.8 t
------------------------------------	---------------------------	-----------------------

HELIDECK POSITION ON VESSEL
STERN

HIGHEST OBSTACLES ON VESSEL
3x LEGS
MAX. 240 ft (ABOVE HLD)

REFUELLING FACILITY N/A	GROUND POWER UNIT N/A	LANDING NET N/A
-----------------------------------	---------------------------------	---------------------------

TD/PM LIGHTING N/A	HELIPORT IDENTIFICATION LIGHTING N/A	STATUS LIGHT N/A
------------------------------	--	----------------------------

FIRE FIGHTING FACILITIES

DIFFS	2 HYDRANTS	CO₂	DRY POWDER
MANUAL ACTIVATION	1x SEMI-RIGID (20m) 1x FLEXIBLE (20m)	1 x 20 kg	2 x 25 kg

NON - COMPLIANCES

- OBSTACLE-FREE SECTOR BELOW HLD INFRINGED BY EMERGENCY EXIT

LIMITATIONS

- H/C OPERATIONS AT DAYTIME ONLY
- H/C OPERATIONS TO ELEVATED VESSEL ONLY
- DANGEROUS GOODS TRANSPORT BY AIR PROHIBITED
- H/C OPERATIONS ONLY WITH CRANES RESTING CLEAR OF OBSTACLE PROTECTED SURFACES

REMARKS

- CONTACT BRIDGE FOR CLEARANCES, REQUESTS AND INFORMATION
- FLIGHT OPERATIONS PROHIBITED WHEN VESSEL IS UNDERWAY
- HELIDECK ORIENTATION TO BE TAKEN FROM HLD STATUS REPORT
- HELIDECK HEIGHT TO BE CHECKED FOR EACH LOCATION

L/B JILL


HLD IDENTIFICATION
L/B JILL

VESSEL SIDE IDENTIFICATION
L/B JILL

LIFTBOAT
SEACOR MARINE

BRIDGE		
CONTACT FREQUENCY TBD WITH PROJECT		
WEATHER INFORMATION ON REQUEST		LIGHTING & DIMMING ON REQUEST
HELIDECK HEIGHT VARIABLE	D-VALUE 22.20 m	MTOW 12.8 t
HELIDECK POSITION ON VESSEL STERN		
HIGHEST OBSTACLES ON VESSEL 3x LEGS MAX. 240 ft (ABOVE HLD)		
REFUELLING FACILITY N/A	GROUND POWER UNIT N/A	LANDING NET N/A
TD/PM LIGHTING N/A	HELIPORT IDENTIFICATION LIGHTING N/A	STATUS LIGHT N/A
FIRE FIGHTING FACILITIES		
DIFFS MANUAL ACTIVATION	2 HYDRANTS 1x SEMI-RIGID (20m) 1x FLEXIBLE (20m)	CO₂ 1 x 20 kg
		DRY POWDER 2 x 25 kg

VESSEL PROFILE VIEW (STARBOARD)

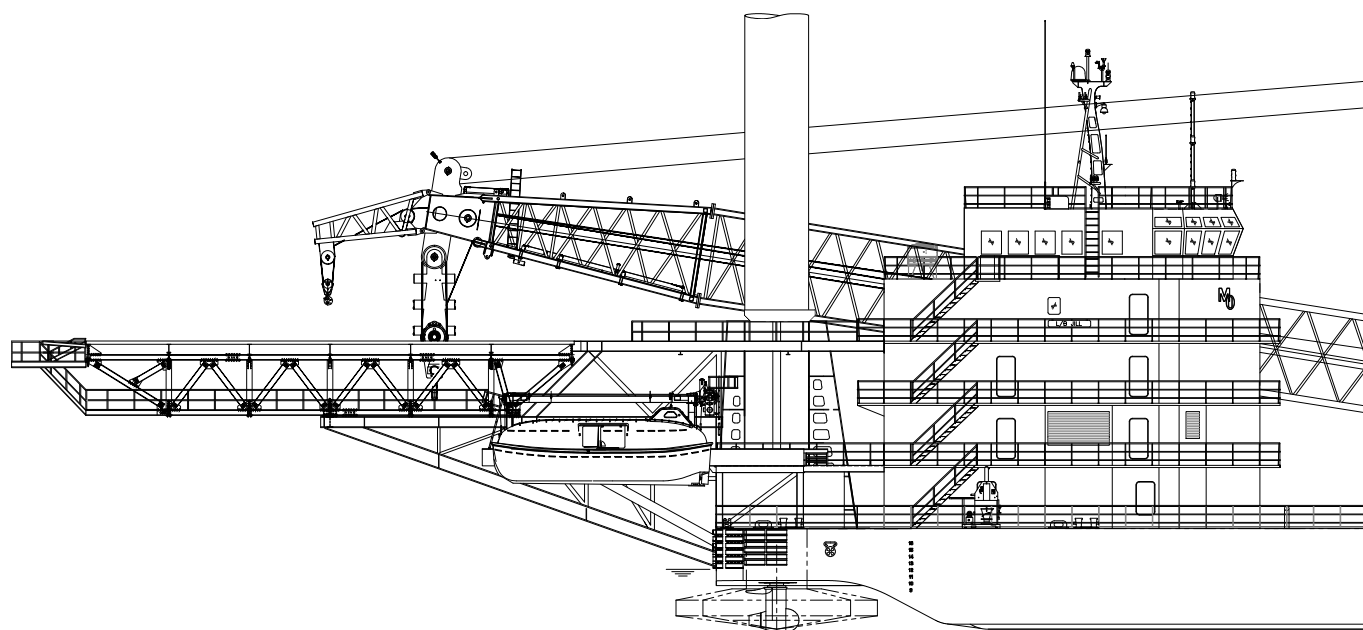

L/B JILL

HLD IDENTIFICATION
L/B JILL

VESSEL SIDE IDENTIFICATION
L/B JILL

LIFTBOAT
SEACOR MARINE

BRIDGE		
CONTACT FREQUENCY TBD WITH PROJECT		
WEATHER INFORMATION ON REQUEST		LIGHTING & DIMMING ON REQUEST
HELIDECK HEIGHT VARIABLE	D-VALUE 22.20 m	MTOW 12.8 t
HELIDECK POSITION ON VESSEL STERN		
HIGHEST OBSTACLES ON VESSEL 3x LEGS MAX. 240 ft (ABOVE HLD)		
REFUELLING FACILITY N/A	GROUND POWER UNIT N/A	LANDING NET N/A
TD/PM LIGHTING N/A	HELIPORT IDENTIFICATION LIGHTING N/A	STATUS LIGHT N/A
FIRE FIGHTING FACILITIES		
DIFFS MANUAL ACTIVATION	2 HYDRANTS 1x SEMI-RIGID (20m) 1x FLEXIBLE (20m)	CO₂ 1 x 20 kg
		DRY POWDER 2 x 25 kg

VESSEL TOP VIEW

